


CT100 Beam Trolley

Data Sheet

ClimbTech

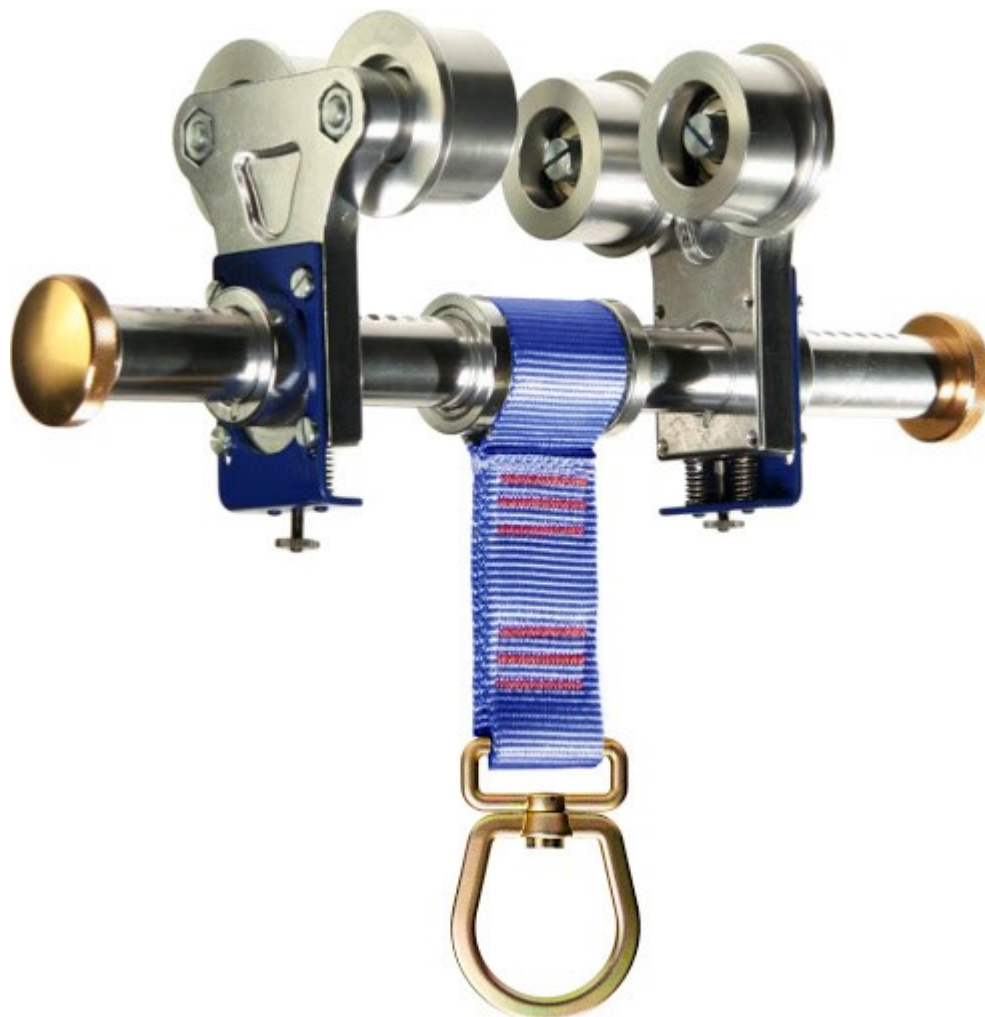


climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

The Climbtech™ Beam Trolley is a mobile anchor point, for use on structural beams. The device is fitted with toggle plates, which allow for simple adjustment of the rollers when installing/uninstalling the device. The Beam Trolley is ideal for use as an anchorage connection for fall arrest systems (not suitable for material handling). No surface alteration (i.e. drilling) is required in order to use the Beam Trolley. The Beam Trolley is fitted with a swivel D ring.

76mm (3")-255mm (10")

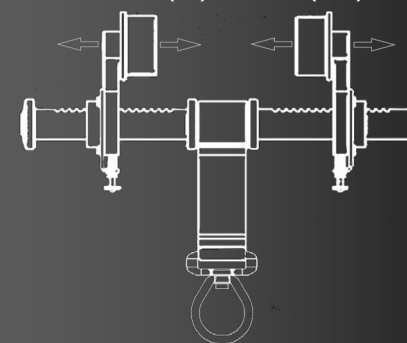

Weight	3.5kg (8lbs)
WLL	140kg (310lbs)
Beam Width Range	76mm (3")-255mm (10")
Beam Flange Thickness	Max 23mm (7/8")
MBS	22kN (5,000lbf)
Standards	OSHA 1910.66, ANSI Z359.1-2007, EN 795:1996 Class B