


CT102 Removable Concrete Anchor 22kN (5,000 lbf)

Data Sheet



Climbtech™ Concrete Anchor Devices are portable, reusable and can be used in vertical, horizontal or overhead concrete substrate surfaces. Once a suitable hole has been drilled, the anchors can be inserted and removed as required. These anchors are suitable for use for fall protection applications. This anchor should be placed into a hole at least 89mm (3^{1/2}”) deep.

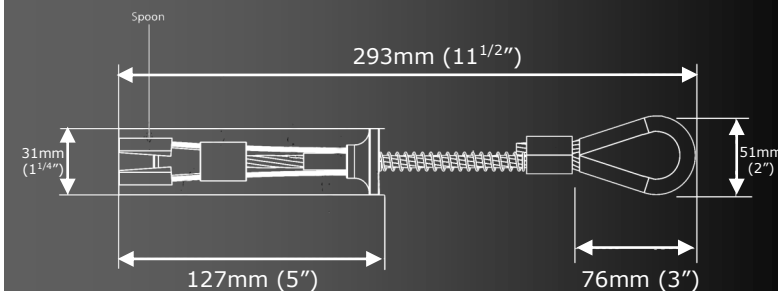

Weight	181g (6oz)
WLL	140kg (310lbs)
Spoon Diameter	20mm (3/4")
Length	293mm (11 ^{1/2} ")
MBS	22kN (5,000lbf)
Standards	OSHA 1926.502 CE 0321, ANSI Z359.1-2007, ANSI Z359.7-2011, EN 795:1996 (+A1:2000) Class B