

GG101 Small Girder Grip

Data Sheet




climb. work. rescue.

I|S|C

SOLUTIONS IN METAL

ISC Girder & Concrete Anchors are a quick and easy portable anchorage solution and can be used in the vertical or horizontal plane. These anchors are operated by using two fingers to pull back the red collar. This action retracts the retention bar, allowing the device to be inserted in to the anchor hole. Once the device is engaged, the red collar can be released, the retention bar is engaged, fixing the device in the anchor hole.

This anchor device has been designed to provide secure anchor points through steel structures, such as I beams.

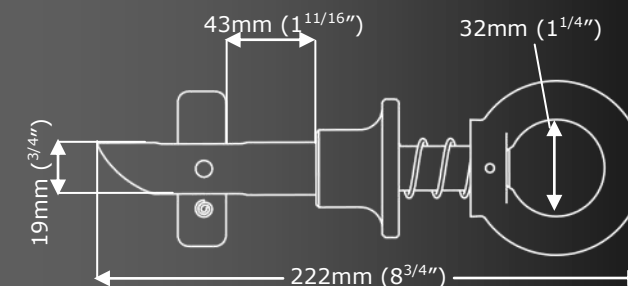

Weight	550g (19oz)
Minimum Beam Thickness	30mm (1 ¹ / ₆ "
Eye/Clip Loop Diameter	32mm (1 ¹ / ₄ "
Body Material	Aluminium
Size of drilled hole	20mm (3/4"
MBS	28kN (6294lbf)