




Item no: 100147

The **MINI-MARK®** lightweight high-pressure pump is equipped with a powerful 2.3 HP 2-stroke engine and a single-stage pump end. Designed for versatility and portability, the MINI-MARK® packs a powerful punch in a compact frame. Whether it's initial attack firefighting or structure protection, the MINI-MARK® is the ultimate lightweight solution for demanding operations.

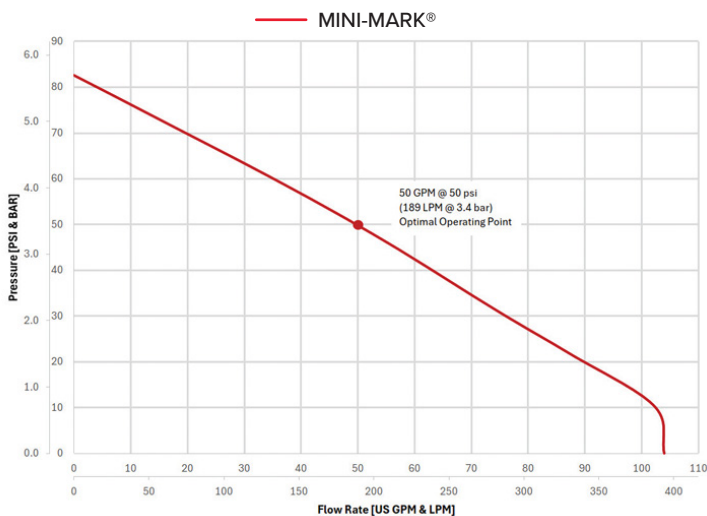

Flow rate at specified pressure

Maximum pressure: **85 PSI** (6 Bar)

Free flow: **102 US gals/min** (386 L/min)

Maximum head: **196'** (60 m)

Weight: **19 lbs** (8.6 kg)

Performance

Flow		Pressure		
US GPM	L/min		PSI	Bar
83	314	@	25	1.7
50	189	@	50	3.4
12	45	@	75	5.2

Optional external fuel tank connection kit available

- Integral fuel tank: autonomy of 1 hour
- External fuel tank: autonomy of 20 hours

MINI-MARK®

LIGHTWEIGHT HIGH-PRESSURE PUMP

APPLICATIONS

- Initial attack firefighting.
- Structure protection.
- Sprinkler operations.
- Tandem pumping over long distances.

FEATURES AND BENEFITS

- Portable, lightweight and compact.
- Anodized aluminum alloy pump components.
- Composite corrosion-resistant impeller.
- Electronic overspeed cutout switch.
- Multiposition - capable of running at any angle.
- Optimal Operating Point: 50 GPM @ 50 PSI (189 LPM @ 3.4 bar).
- Integrated, ergonomic carry handle.
- Detachable pump end.
- Throttle with detents to avoid throttle drift.
- Centrifugal clutch feature.

Scan the QR code
to learn more



WATERAX 
WE MOVE WATER